SPECIFICATION

LED DOWN SPOT

Product NO. DDS-27610.06

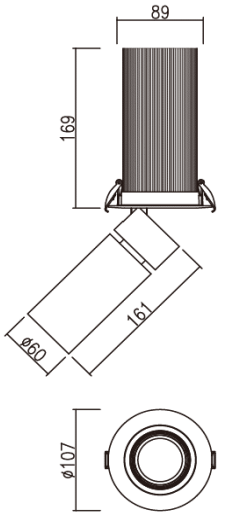

- White
- Gray
- Black

0.3 kg

Ø 94 [mm]

Material

Trim	AL. DIE-CASTING
Adjustable Plate	AL. DIE-CASTING (ROTATE ∠ 355 º)
Housing	AL. EXTRUDE (TILT ∠ 90 º)
Mounting Ring	AL. EXTRUDE
Heat Sink	AL. DIE-CASTING
Reflector	LENS
Size	Ø 107 x H 169 [mm]
Hole Cut	Ø 94 [mm]

Description	COB TYPE		
Input Power	19 W		
Output Power	16 W		
Luminous Flux	3 000 K	23.6 º	1 235 lm
		32.8 º	1 505 lm
Color Temperature	4 000 K / 3 000 K		
Color Rendering Index (CRI)	80 / 90		
Operating Temperature Range	-20 to +40 ℃		
SDCM	3 Step		

Driver

Input Voltage Range	220-240 Vac , 50/60 Hz
Output Current	450 mA
Output Voltage	35 Vdc
Power Factor	0.9 이상
Drive Lifetime	50 000 Hours
Maintenance of Lumen -L80	50 000 Hours at 25 ℃

CCT MULTIPLIERS

	CRI 80	CRI 90
3 000 K	x 1.00	x 0.85
4 000 K	x 1.06	x 0.91

[3 000 K / CRI 80]



1 235 lm

(ZOOM IN)



1 505 lm

(ZOOM OUT)